


# GRILLI AD OMEGA INOX AISI 316

Con perno a vite - Modello R-7825

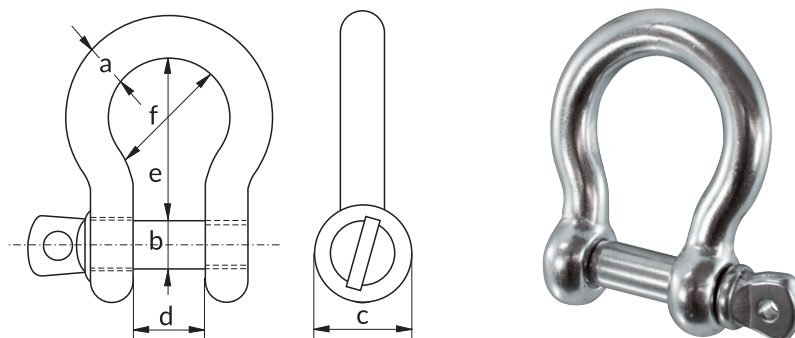


| Codice        | Portata<br>WLL<br>t | Dimensioni |         |         |         |         |         | Peso<br>Kg |
|---------------|---------------------|------------|---------|---------|---------|---------|---------|------------|
|               |                     | a<br>mm    | b<br>mm | c<br>mm | d<br>mm | e<br>mm | f<br>mm |            |
| GRL-INPV0300G | 0,3                 | 8          | 8       | 16      | 16      | 32      | 24      | 0,06       |
| GRL-INPV0400G | 0,4                 | 10         | 10      | 20      | 20      | 40      | 30      | 0,15       |
| GRL-INPV0600G | 0,6                 | 12         | 12      | 24      | 24      | 48      | 36      | 0,22       |
| GRL-INPV1000G | 1                   | 16         | 16      | 32      | 32      | 64      | 48      | 0,55       |
| GRL-INPV1500G | 1,5                 | 20         | 20      | 40      | 40      | 80      | 60      | 0,97       |

• Coefficiente di sicurezza 6

# GRILLI AD OMEGA INOX AISI 316

Con dado e coppia - Modello R-7827

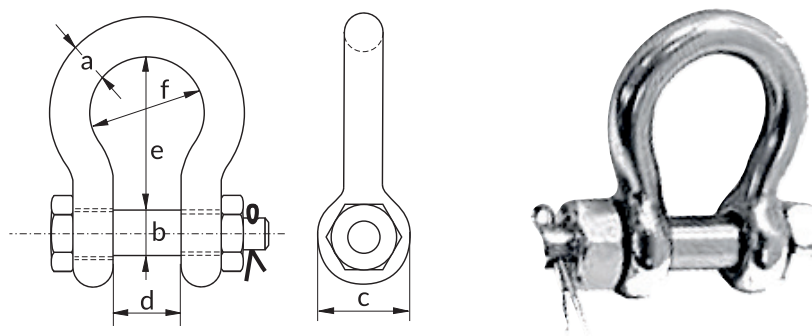

| Codice        | Portata<br>WLL<br>t | Dimensioni |         |         |         |         |         | Peso<br>Kg |
|---------------|---------------------|------------|---------|---------|---------|---------|---------|------------|
|               |                     | a<br>mm    | b<br>mm | c<br>mm | d<br>mm | e<br>mm | f<br>mm |            |
| GRL-INDC0300G | 0,3                 | 8          | 8       | 16      | 16      | 32      | 24      | 0,07       |
| GRL-INDC0400G | 0,4                 | 10         | 10      | 20      | 20      | 40      | 30      | 0,16       |
| GRL-INDC0600G | 0,6                 | 12         | 12      | 24      | 24      | 48      | 36      | 0,23       |
| GRL-INDC1000G | 1                   | 16         | 16      | 32      | 32      | 64      | 48      | 0,57       |
| GRL-INDC1500G | 1,5                 | 20         | 20      | 40      | 40      | 80      | 60      | 0,99       |
| GRL-INDC2000G | 2                   | 22         | 22      | 44      | 44      | 88      | 66      | 1,46       |
| GRL-INDC3000G | 3                   | 25         | 25      | 50      | 50      | 100     | 75      | 2,20       |

• Coefficiente di sicurezza 6