


RUD-Qualità in PINK

Grado80, Grado 100(VIP) e Grado120(ICE)


Gradi di qualità RUD



Grado **80** **VIP** **ICE**
100 **120**

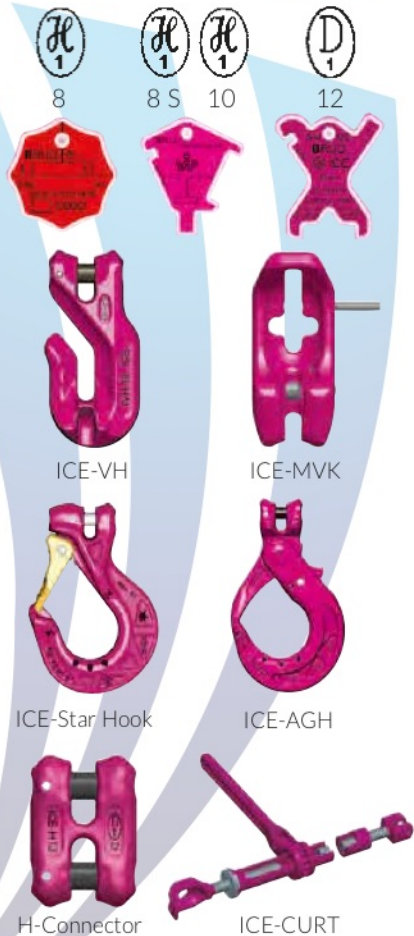

Tipo di sollevamento		1-braccio			2-braccio		3-4 braccio	
		0		0-45°	> 45-60°	0-45°	> 45-60°	
Angolo d'inclinazione β								
Fattore di carico		1,0		1,4	1,0	2,1	1,5	
Diam. Catena	Grado di qualità							
Ø 4	VIP	0,63	0,88	0,63	1,32	0,95		
	Gk 8	1,12	1,6	1,12	2,36	1,7		
	ICE	1,8	2,5	1,8	3,75	2,7		
Ø 6	Gk 8	2,0	2,8	2,0	4,25	3,0		
	VIP	2,5	3,5	2,5	5,25	3,75		
	ICE	3,0	4,2	3,0	6,3	4,5		
Ø 8	Gk 8	3,15	4,25	3,15	6,7	4,75		
	VIP	4,0	5,6	4,0	8,4	6,0		
	ICE	5,0	7,0	5,0	10,5	7,5		
Ø 10	Gk 8	5,3	7,5	5,3	11,2	8,0		
	VIP	6,7	9,5	6,7	14,0	10,0		
	ICE	8,0	11,2	8,0	16,8	12,0		
Ø 13	Gk 8	8,0	11,2	8,0	17,0	11,8		
	VIP	10,0	14,0	10,0	21,0	15,0		
	ICE	12,5	17,0	12,5	26,5	19,0		
Ø 16	Gk 8	10,0	14,0	10,0	21,0	15,0		
	VIP	12,5	17,0	12,5	26,5	19,0		
Ø 18	Gk 8	12,5	17,0	12,5	26,5	19,0		
	VIP	16,0	22,4	16,0	33,6	24,0		
Ø 20	Gk 8	15,0	21,2	15,0	31,5	22,4		
	VIP	20,0	28,0	20,0	42,0	30,0		
Ø 22	Gk 8	21,2	30,0	21,2	45,0	31,5		
	VIP	31,5	45,0	31,5	67,0*	47,5*		
Ø 26	Gk 8	31,5	45,0	31,5	67,0	47,5		
	VIP	45,0	63,0	45,0	94,5	67,5		
Ø 28	Gk 8	45,0	63,0	45,0	94,5	67,5		
	VIP	63,0	88,2	63,0	132,3	94,5		
Ø 32	Gk 8	63,0	88,2	63,0	132,3	94,5		
	VIP	88,2	123,2	88,2	185,2	132,3		



Attenzione:
 In accordo con la BCR 500 sezione 2.8, in caso di carico asimmetrico sollevato a più braccia il WLL dovrà essere calcolato sulla base di un unico braccio.

