


# GRILLI AD OMEGA

Con dado e coppiglia - Modello G-4163

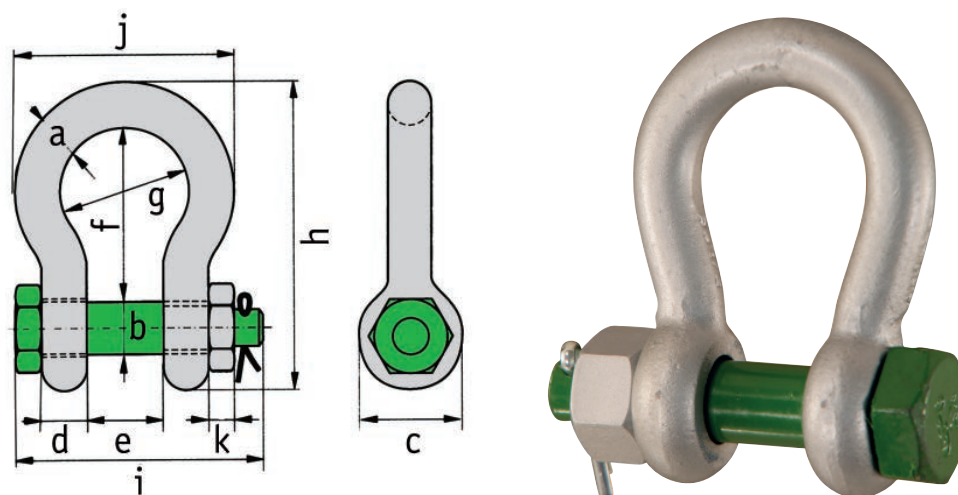

Codice	Portata WLL	Misura	Dimensioni											Peso
			t	inches	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	
GDC00500-GP	0,5	1/4	7	8	16,5	7	12	29	20	48,5	42	34	4	0,06
GDC00750-GP	0,75	5/16	9	10	20	9	13,5	32	22	56	50	40	5	0,11
GDC01000-GP	1	3/8	10	11	22,5	10	17	36,5	26	63,5	61	46	8	0,16
GDC01500-GP	1,5	7/16	11	13	26,5	11	19	43	29	74	68	51	11	0,22
GDC02000-GP	2	1/2	13,5	16	34	13	22	51	32	89	83	58	13	0,42
GDC03250-GP	3,25	5/8	16	19	40	16	27	64	43	110	99	75	17	0,74
GDC04750-GP	4,75	3/4	19	22	46	19	31	76	51	129	115	89	19	1,18
GDC06500-GP	6,5	7/8	22	25	52	22	36	83	58	144	131	102	22	1,77
GDC08500-GP	8,5	1	25	28	59	25	43	95	68	164	151	118	25	2,58
GDC09500-GP	9,5	1 1/8	28	32	66	28	47	108	75	185	167	131	27	3,66
GDC12000-GP	12	1 1/4	32	35	72	32	51	115	83	201	179	147	30	4,91
GDC13500-GP	13,5	1 3/8	35	38	80	35	57	133	92	227	198	162	33	6,54
GDC17000-GP	17	1 1/2	38	42	88	38	60	146	99	249	203	175	39	8,19
GDC25000-GP	25	1 3/4	45	50	103	45	74	178	126	300	244	216	45	14,22
GDC35000-GP	35	2	50	57	111	50	83	197	138	331	270	238	57	19,85
GDC42500-GP	42,5	2 1/4	57	65	130	57	95	222	160	377	302	274	65	28,33
GDC55000-GP	55	2 1/2	65	70	145	65	105	260	180	433	330	310	70	39,59
GDC85000-GP	85	3	75	83	163	75	127	329	190	527	376	355	83	62

- Acciaio alta resistenza grado 6
- Finitura: zincatura a caldo
- Temperatura di lavoro: -40°C ÷ 200°C
- Coefficiente di sicurezza 6:1
- Conforme alla direttiva macchine 2006/42/CE